

4/8/16-Ch Standalone DVR

Quick Start Guide

For H.264 Digital Video Recorder
All rights reserved

*All contents of this document may change without prior notice.

This 4/8/16-CH DVR Quick Start Guide discusses how to configure initial setup of DVR with 24/7 all time recording schedule. For more detailed information, please reference the Standalone DVR User Manual.

Hardware Connection

1. Mount and screw a hard drive to DVR case. Connect **SATA** and **Power** cable to DVR board.




2. Connect all camera cables to **Video In** on the back panel of the DVR.
3. Connect a monitor and a mouse to DVR.
4. Connect a 12V DC power to start the DVR.

Initial Setup Wizard

When DVR is turned on for the first or after the system has been reset, setup WIZARD will start.

1. Select an appropriate **Time Zone**, **System Date**, and **System Time**, and click **Next**.

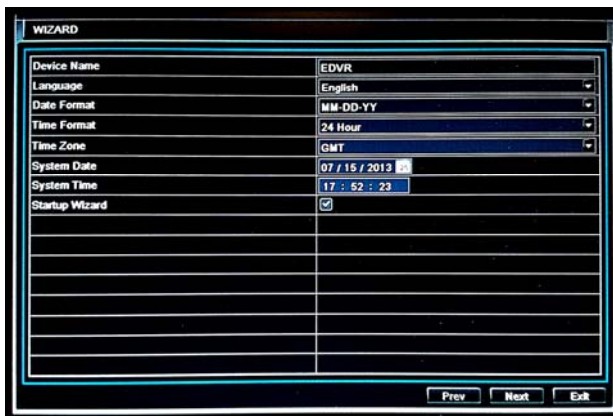

2. Click **Next** unless you have to use a static IP address or different Ports.

The screenshot shows the 'WIZARD' window with the following settings:

HTTP Port	80
Server Port	6036
Obtain an IP address automatically	☒
IP Address	192.168.001.100
Subnet Mask	255.255.255.000
Gateway	192.168.001.001
Preferred DNS Server	000.000.000.000
Alternate DNS Server	000.000.000.000

At the bottom, there are buttons for 'Prev', 'Next', and 'Exit'.

3. If you want to change resolution, fps, and quality of each channel, set them accordingly. Otherwise, click **Next**.

The screenshot shows the 'WIZARD' window with a table for channel settings:

CH	Resolution	Fps	Quality
1	CIF	30	Higher
2	CIF	30	Higher
3	CIF	30	Higher
4	CIF	30	Higher
5	CIF	30	Higher
6	CIF	30	Higher
7	CIF	30	Higher
8	CIF	30	Higher

Below the table, there is a summary: 'All Remaining : 0 (CIF), 0 (HD1) 0 (D1)'. At the bottom, there are buttons for 'Prev', 'Next', and 'Exit'.

4. Hard drive will be detected automatically if it is connected properly. Select a hard drive and click **Format** to delete all previous data. When format is done, click **Finish**.


The screenshot shows the 'WIZARD' window with a table of detected hard drives:

ID	Type	Size[GB]	Free[GB]	Status	Properties	Sources
01	SATA	1863.02	1692.50	Normal	Read & Write	Local

At the bottom, there are buttons for 'Refresh', 'Format', 'Prev', 'Finish', and 'Exit'.

How to setup 24/7 Recording Schedule?

1. After completing the Wizard, Live Preview screen will be displayed.

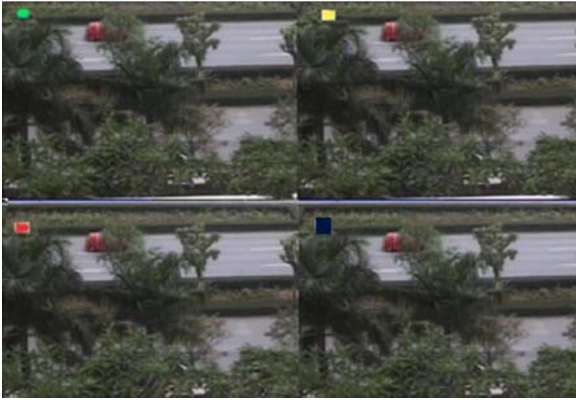


2. If you **right click** anywhere in the screen, **main menu** will show up on the bottom. Right click again to make the main menu disappear.



3. Click **function menu** as shown above, and login using the correct User Name and Password. The **default User Name / Password**: admin / 123456




4. Go to **Setup** in the MAIN MENU.

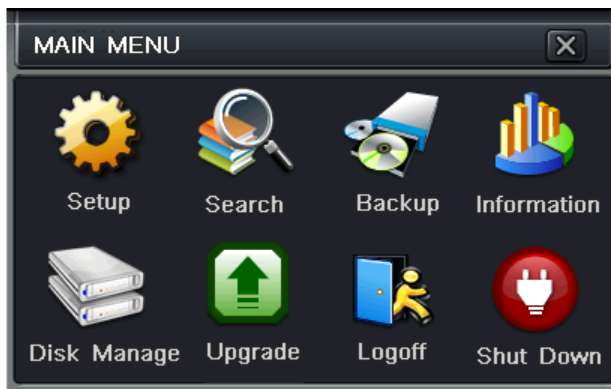

5. Go to **Schedule** in the Setup




6. **Double click** on a day such as Sunday you want to schedule for recording for channel 1. We will use Sunday as an example.

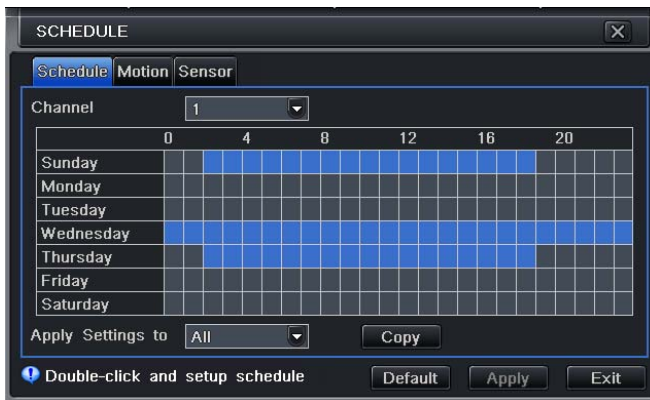


Note: The picture shows an example of different recording schedules for different days. In this **Quick Start Guide**, we will schedule the DVR to record all the time. Sensor tab is not available in 4ch & 8ch DVR.

7. Click **Add** and the default schedule starts from 00:00 to 23:59, and click **Copy** to apply setting to all days, and click **OK** to save. The screen will go back to the previous section and the entire block will mark all blue.

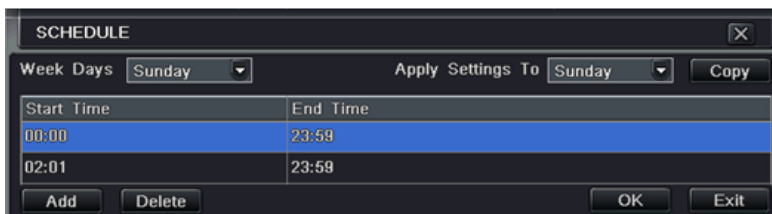

8. You just added 24 hour recording schedule on channel 1, and click **Copy** to apply settings to all channels, and click **Apply** to save it.

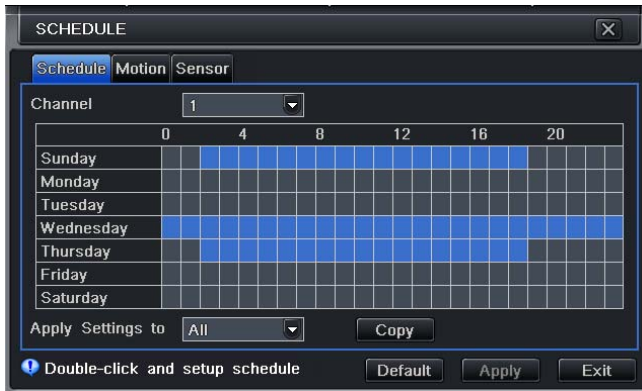


Note: The picture may look different from the procedures.

9. If all the blocks are blue in each channel, you created a 24/7 recording schedule successfully.

How to Remove Motion Recording?

In this Quick Start Guide, we will remove motion recording. 24/7 Motion recording is already set by default. We will remove all motion recording schedules.

1. Go to **Motion** tab, and double click on a day such as Sunday in channel 1.
2. Select a schedule → **Delete** → **Copy** → **OK**.
3. We will see the entire block is grey on channel 1.
4. Click **Copy** and then click **Apply** to all channels.
5. Now, motion recording schedule has been removed in all channels.

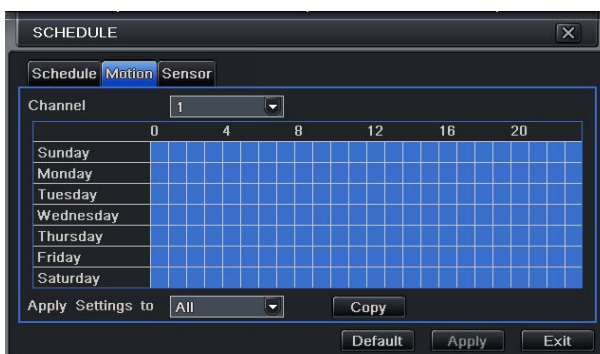

Note: If you setup properly, all blue blocks will turn grey in each channel. For 4ch & 8ch DVR, Sensor recording is not applicable.

Now, basic setup and 24/7 recording schedule have been finished.

Right click several times until you exit Menu to Live Preview. If recording indicators are all blue, then you have successfully setup 24/7 recording schedule.